

Features

- Ballast-Compatible & Ballast-Bypass Options
- Rotate-able ends
- 40% More Efficient than Fluorescents
- High Lumen Efficiency - 120 lm/w
- Available in 4000K & 5000K


Specifications

Input Voltage	110 - 277 VAC
Input Power	18W
CCT	4000K (Natural White), 5000K (Cool White)
Lumens	2100 lm
CRI	Ra >80
Luminous Efficacy	120 lm/w
Length	4' (1200mm)
Certification	cULus



LM79
LM80

Dimensions

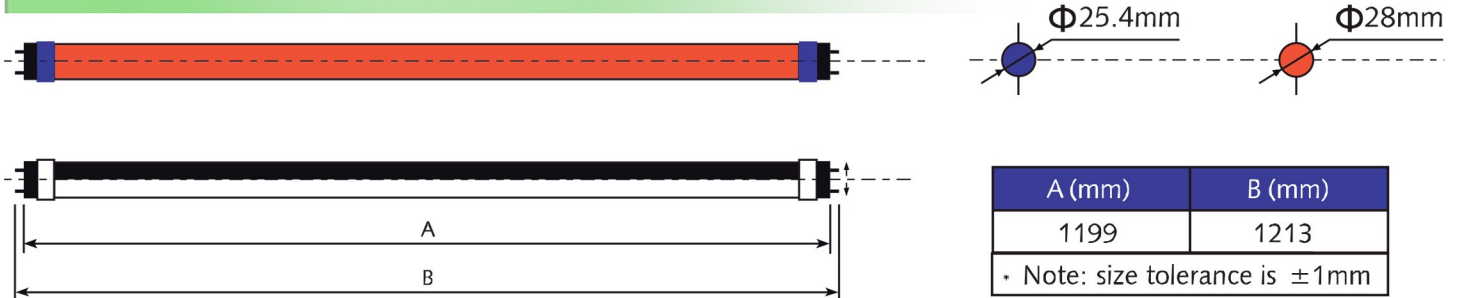

Photometrics

