

LED Flood Light



FEATURES




- Unique Modular Design
- Wattage & CCT Selectable
- 22°/35°/57°/110° Beam Angle Options
- IP65 Rated
- 1/2" NPT Threaded Arm with Locking Swivel
- U-Bracket Optional

APPLICATIONS


- Indoor and Outdoor Lighting
- Landscape Lights
- Flood Lights

Product Pictures					
Model No.	D2112WP	D2128WP	D2140WP	D2150WP	D2160WP
Wattage Selectable	12W / 6W	28W / 20W / 12W	40W / 30W / 20W	50W / 35W / 25W	60W / 45W / 30W
Voltage	100-277V	100-277V	100-277V	100-277V	100-277V
Lumen Range	900 - 1,500 LM	2,100 - 3,780 LM	3,200 - 4,800 LM	4,125 - 6,250 LM	5,100 - 7,800 LM
Efficacy Range	125 - 165 LM/W	135 - 175 LM/W	120 - 160 LM/W	125- 165 LM/W	130- 170 LM/W
CCT Selectable	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
CRI	70	70	70	70	70
Beam Angle	22°/35°/57°/110°	22°/35°/57°/110°	22°/35°/57°/110°	22°/35°/57°/110°	22°/35°/57°/110°
Fixture Material	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum
Fixture Color	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)
Photocontrol	YES	YES	YES	YES	YES
IP Rating	IP65	IP65	IP65	IP65	IP65
Operating Temp.	-35°C to +40°C	-35°C to +40°C	-35°C to +40°C	-35°C to +40°C	-35°C to +40°C
Safety Certification	ETL cETL	ETL cETL	ETL cETL	ETL cETL	ETL cETL
Energy Certification	DLC Pending	DLC Pending	DLC Pending	DLC Pending	DLC Pending
Test Reports	LM79, LM80, IES Pending	LM79, LM80, IES Pending	LM79, LM80, IES Pending	LM79, LM80, IES Pending	LM79, LM80, IES Pending
Average Lifespan	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Warranty	1-year limited	1-year limited	1-year limited	1-year limited	1-year limited

DIMENSIONS

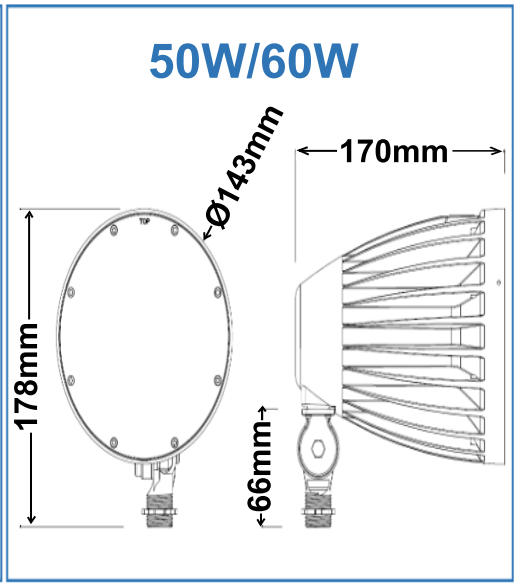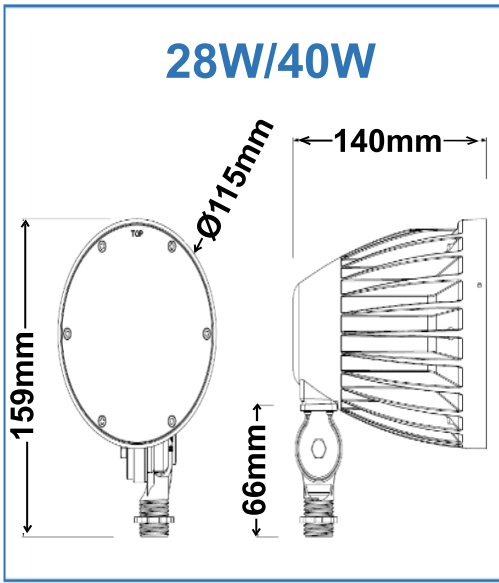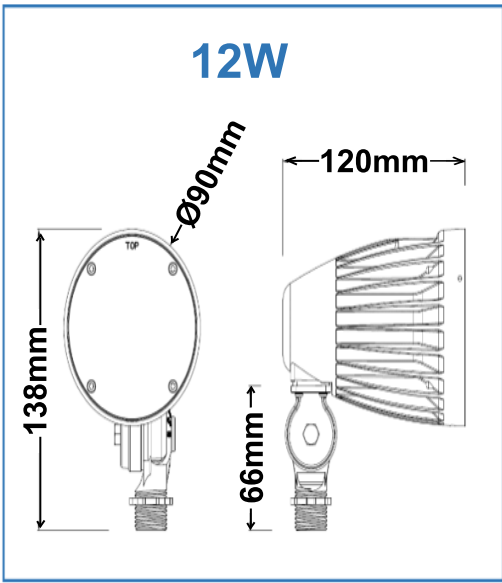

RGBW COLOUR CHANGE OPTIONS

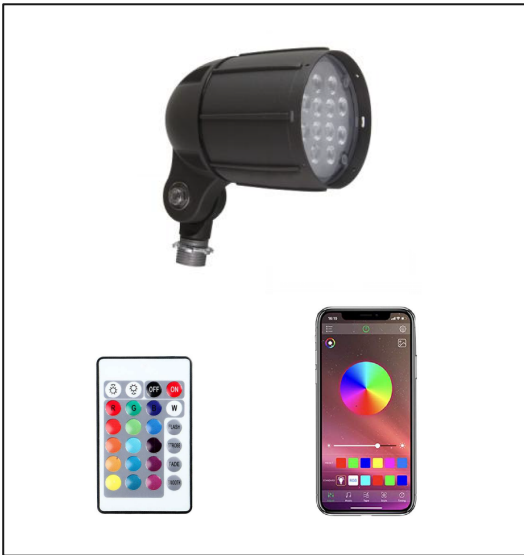

Colour(RGBW):	24V RGBW
LED Chip:	3030
Beam Angle:	22° / 35° / 57°
Fixture Surface:	Bronze & Black
Control Options:	RF Remote & Smart Phone App

MOUNTING & ACCESSORIES

