

LED RGB & RGBW Ribbon



SPECIFICATIONS

	5 meter (16ft) roll	10 meter (32ft) roll
Input Voltage	12V	
Power	7.2W / meter , 2.2W / foot	
Power Requirements	36W	72W
IP Rating	IP65	
Dimming	Dimmable	
LED	Epistar	
CRI	Ra > 80	
Cutting	Cuttable Every 16.5cm (6.5 inches)	
Installation	3M Double Sided Tape, Aluminium Track	
Certification	cETLus	


FEATURES

- 12 & 24 Volt
- 2 & 3 oz. copper PCB options
- Cutting increments for custom lengths
- Available indoor/outdoor ratings
- 3M double sided tape on back
- Can be cut every 100mm


APPLICATIONS

- Cove, Valence, & Halo Lighting
- Path and contour marking
- Backlight or edge lighting for signage
- Architectural lights for canopies, corridors, windows, archways


CONNECTORS

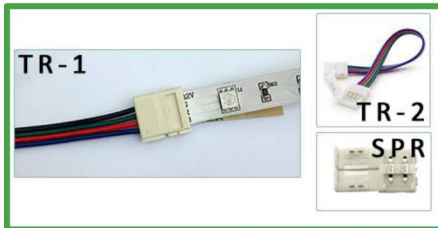

RIB-1/RIB-3 DIMENSIONS

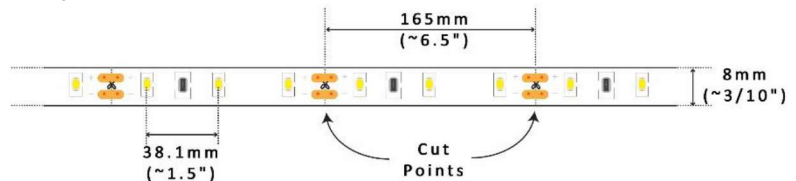

RIB-2 DIMENSIONS

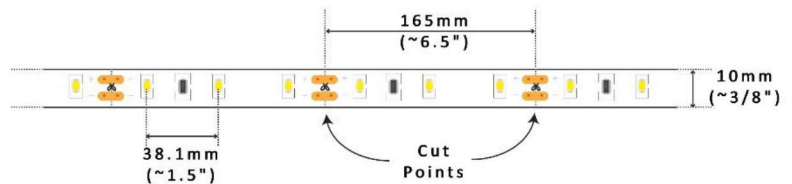

Model	Color	White Options	Length (m)	LED/M	LED Type	Copper Oz.	Beam Angle	Voltage	Max Power	IP Options
RIB-RGB	RGB	N/A	5/10	30	SMD5050	2	120°	12	7.2 w/m	IP54, IP67, IP68
RIB-RGBW	RGB+W	3000k, 4000k	5/10	60	SMD5050	3	120°	24	16 w/m	IP54, IP67, IP68

12V/24V POWER SUPPLIES: Design21 stocks a wide variety from electronic, magnetic, dimmable, non dimmable, open and closed types. [+]

LED REMOTE CONTROL: We stock various RGB and RGBW Controllers/Wifi with multiple control options. [+]

[+] Information on www.design21.ca

Power Supplies




LED/WiFi Controllers



Wifi + App
8 Zones



Track

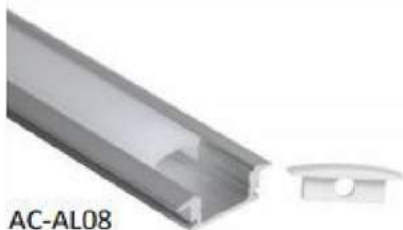

AC-AL08

Recessed Winged Track



AC-AL06

Standard Track



AC-AL18

45° Corner Track