

LED RGBW Ribbon



SPECIFICATIONS

	5 meter (16ft) roll	10 meter (32ft) roll
Input Voltage	24V	
Power	12W / meter	
Power Requirements	60W	120W
IP Rating	IP64	
Dimming	Dimmable	
LED	Epistar	
CRI	Ra > 80	
Cutting	Cuttable Every 16.5cm (6.5 inches)	
Installation	3M Double Sided Tape, Aluminium Track	
Certification	cETLus	

FEATURES

- 24 Volt
- 2oz. copper PCB options
- Cutting increments for custom lengths
- Available indoor/outdoor ratings
- 3M double sided tape on back
- Can be cut every 100mm


APPLICATIONS

- Cove, Valence, & Halo Lighting
- Path and contour marking
- Backlight or edge lighting for signage
- Architectural lights for canopies, corridors, windows, archways


CONNECTORS



RGB DIMENSIONS

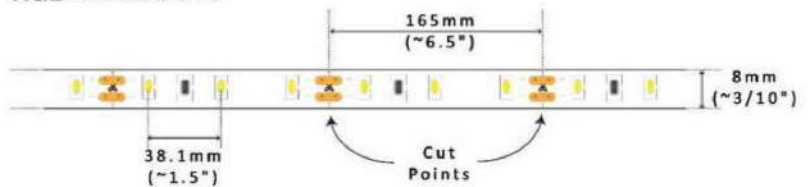

RGBW DIMENSIONS

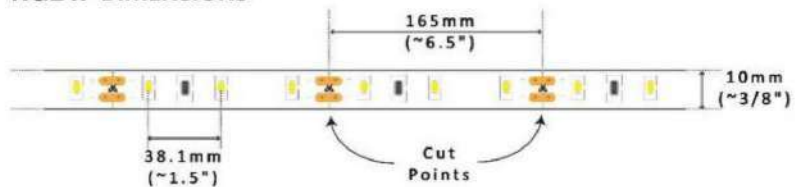

Model	Color	White Options	Length (m)	LED/M	LED Type	Copper Oz.	Beam Angle	Voltage	Max Power	IP Options
RIB-RGB	RGB	N/A	5/10	30	SMD5050	2	120°	12	7.2w/m	IP54, IP67, IP68
RIB-RGBW	RGB+W	3000k, 4000k	5/10	60	SMD5050	2	120°	24	12w/m	IP54, IP67, IP68

12V/24V POWER SUPPLIES: Design21 stocks a wide variety from electronic, magnetic, dimmable, non dimmable, open and closed types. [+]

LED REMOTE CONTROL: We stock various RGB and RGBW Controllers/Wifi with multiple control options. [+]

[+] Information on www.design21.ca



ACCESSORIES

Power supplies



LED/WIFI Controllers



**Wifi + App
 8 Zones**



Tracks

Recessed Winged Track



AC-AL08

Standard Track



AC-AL06

45° Corner Track



AC-AL18